



TRENNJAEGER

ALUMINIUM CIRCULAR SAWS – MANUAL/SEMI AUTOMATIC Series WAK TL

HIGHLIGHTS

- Infinitely adjustable bevel cutting 20°-90°-0°
- Two-hand safety operation by push button
- Electrically fused work protective hood



TECHNICAL DATA AT A GLANCE

Machine type	mm	m/min		90°	45°
WAK TL 350 HA	350	3.000	-22,5°/90°/0°	125/110x110/ 175x175	105/85x85/ 100x80
WAK TL 800 HA	800	2.300	-22,5°/90°/0°	250/240x240/ 500x90	230/200x200/ 280x50

Further information on the machine series and numerous accessories can be found on our website:
www.wagner-maschinen.de/en/trennjaeger-saws/circular-saws



TRENNJAEGER

ALUMINIUM CIRCULAR SAWS – MANUAL/SEMITAUTOMATIC WAK TL350HA/800HA



ALL HIGHLIGHTS AT A GLANCE

- Infinitely adjustable bevel cutting 20°-90°-0°
- Two-hand safety operation by push button
- Electrically fused work protective hood
- Optimally adjustable pneumatic cylinder, left and right of the saw blade, vertically arranged
- Adjustable stop rail up to approx. 70 / 210 mm for slitting materials
- Ergonomically arranged control panel
- Maintenance unit with pressure gauge and blow-off gun
- Spraying oil tank for the minimum greasing system
- Chip tray (option)
- Heavy duty version of the machine frame

Further information on the machine series and numerous accessories can be found on our website:
www.wagner-maschinen.de/en/trennjaeger-saws/circular-saws

TECHNICAL DATA

- Saw blade flange 32 / 32 / 50 / 50 / 50 mm
- Max. cutting height 125 / 130 / 180 / 230 / 300 mm
- Machine dimensions 870 x 710 x 1.435 / 1.500 x 1.550 x 1.950 mm

- Working height 970 mm
- Machine weight 210 / 1.050 kg
- Saw blade change lateral left
- Central front operation

STANDARD EQUIPMENT

- Horizontal clamping cylinder with infinitely variable hydropneumatic underfloor feed from bottom to top.
- Total power 1,5 / 7,5 kW
- Saw blade diameter 350 / 800 mm
- 2-fold vertical clamping system, infinitely adjustable
- 2-fold horizontal clamping system, infinitely adjustable (Option for WAK 350 series)


- Protective hood with large viewing window
- Minimum spraying unit with maintenance unit
- Air blow-out gun with hose
- Extraction socket for option with extraction system or with chip tray

SPECIAL EQUIPMENT

- Digital angle display for WAK-TL series
- Horizontal clamping cylinder (set) for WAK TL 350 HA
- Back stop line with sticked plastic
- Interior top fitted with noise insulation mats
- Micro spraying system, minimum greasing
- 5 l disposable container for micro-spray
- Frequency converter with infinitely variable cutting speed

- AUTOMATIC opening of the hood for WAK TL 800
- Chip tray
- Retrofitting to semiAUTOMATIC with height limitation
- Lateral cover on both sides of the machine
- Preparation for extraction
- Chip extraction
- Y-connection piece Ø 120 mm
- Hose for chip extraction system Ø 120 mm

DETAIL PICTURE

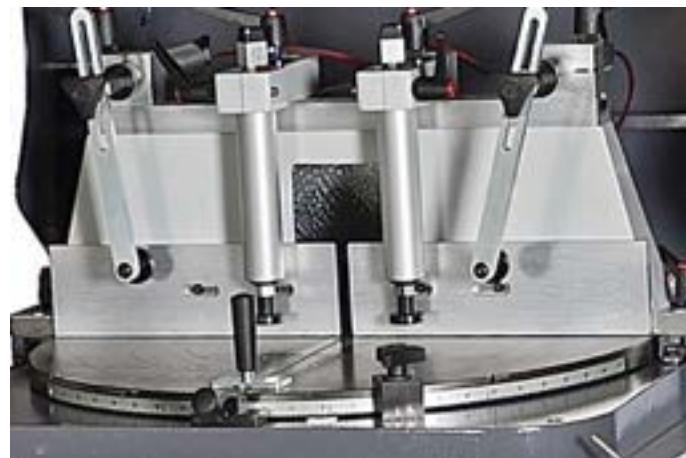

Bevel with scale

Further information on the machine series and numerous accessories can be found on our website:
www.wagner-maschinen.de/en/trennjaeger-saws/circular-saws

We reserve the right to make design changes in the course of technical improvements. Illustrations, dimensions and weights are not binding.